






# Nylon Hex Bolts (Cap Screws)



Hex



Slotted Hex

Also available:



Hex Socket



Socket Set

Add the following suffixes to specify head styles when ordering:

- H = hex
- SH = slotted hex
- HS = hex socket
- SS = socket set

Part No.	Size	Length	Part No.	Size	Length
B 1420X.375	1/4-20*	3/8	B 3816X.500	3/8-16	1/2
B 1420X.500		1/2	B 3816X.750		3/4
B 1420X.625		5/8	B 3816X1.000		1
B 1420X.750		3/4	B 3816X1.250		1-1/4
B 1420X1.000		1	B 3816X1.500		1-1/2
B 1420X1.250		1-1/4	B 3816X2.000		2
B 1420X1.500		1-1/2	B 3816X2.500		2-1/2
B 1420X2.000		2	B 3816X3.000		3
B 1420X2.500		2-1/2	B 1213X.500	1/2-13	1/2
B 1420X3.000		3	B 1213X.750		3/4
B 1428X.500	1/4-28	1/2	B 1213X1.000		1
B 1428X.625		5/8	B 1213X1.250		1-1/4
B 1428X.750		3/4	B 1213X1.500		1-1/2
B 1428X1.000		1	B 1213X2.000		2
B 1428X1.250		1-1/4	B 1213X2.500		2-1/2
B 1428X1.500		1-1/2	B 1213X3.000		3
B 51618X.500	5/16-18	1/2	B 5811X.500	5/8-11	1/2
B 51618X.750		3/4	B 5811X1.000		1
B 51618X1.000		1	B 5811X2.000		2
B 51618X1.250		1-1/4	B 5811X4.000**		4
B 51618X1.500		1-1/2	B 3410X.750	3/4-10	3/4
B 51618X2.000		2	B 3410X4.000**		4
B 51618X2.500		2-1/2	B 3410X5.500		5-1/2
B 51618X3.000		3	B 789X.750	7/8-9	3/4
			B 789X4.500**		4-1/2

### Minimum order:

**Hex Head: 100, Slotted Hex: 500.**  
**Hex Socket and Socket Set available at additional charge. Minimum order 1000.**

\* Also available in socket head and Phillips fillister.  
 \*\*Fully threaded.  
 Longer lengths available.  
 Other materials on page 210. Technical data on page 117.

### Thread length:

Bolts are usually threaded as follows:  
 (Diameter x 2) + 1/2 inch.



## Machined PVC Hex Bolts (Cap Screws)

As well as PVC, these are available in delrin, polypropylene, teflon and other materials in sizes from 1/4-20 to 1"-8, and lengths up to 6".



Part No.	Size	Length
<b>VB 1420X.750H</b>	1/4-20	3/4
<b>VB 1420X1.000H</b>		1
<b>VB 51618X1.000H</b>	5/16-18	1
<b>VB 3816X.750H</b>	3/8-16	3/4
<b>VB 3816X1.000H</b>		1
<b>VB 1213X1.000H</b>	1/2-13	1
<b>VB 1213X1.500H</b>		1-1/2

Minimum order 100.



## Nylon Thumb Screws

### KNURLED THUMB SCREWS

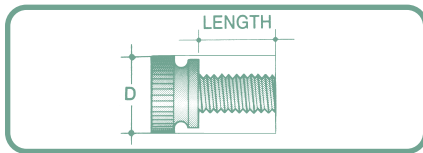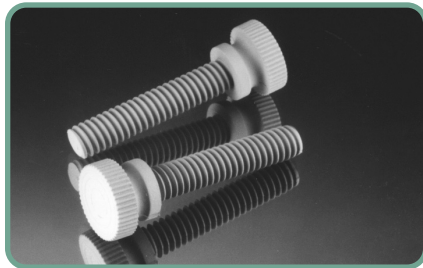

Thumb screws offer easy assembly and adjustment and will not cut fingers. Vibration-resistant, they stay in place

and are knurled for positive grip. These can be used as an economical alternative for knobs.

Part No.	Size	Length	D
<b>TS 440X.250</b>	4/40	1/4	.300
<b>TS 632X.250</b>	6/32	1/4	.360
<b>TS 632X.500</b>		1/2	
<b>TS 832X.375</b>	8/32	3/8	.425
<b>TS 1024X.500</b>	10/24	1/2	.425
<b>TS 1024X.750</b>		3/4	
<b>TS 1032X.500</b>	10/32	1/2	.425
<b>TS 1032X.750</b>		3/4	
<b>TS 1032X1.000</b>		1	
<b>TS 1420X.500</b>	1/4-20	1/2	.540
<b>TS 1420X.750</b>		3/4	
<b>TS 1420X1.000</b>		1	
<b>TS 1420X1.250</b>		1-1/4	
<b>TS 1420X1.500</b>		1-1/2	
<b>TS 51618X1.000</b>		5/16-18	
<b>TS 3816X1.500</b>	3/8-16	1-1/2	.687

Minimum order 1000.

Other sizes and lengths available.