
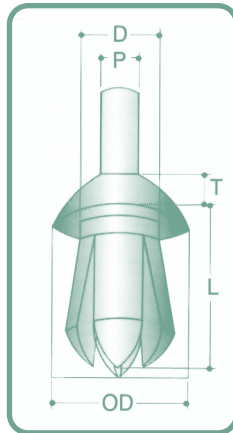


Nylon Rivets

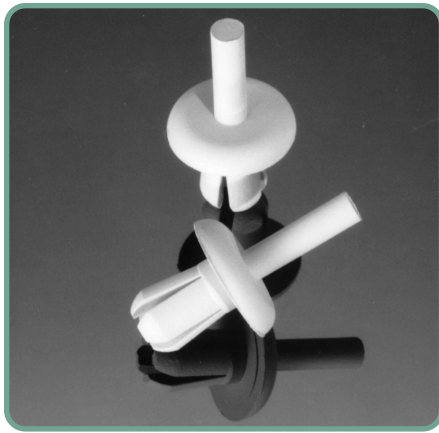

These one-piece blind drive rivets are permanent fasteners that can be used with plastics, sheet metal, printed circuit boards, etc. Perfect for fastening when only one side of work piece is accessible. No tools are required; the drive pin, when forced in, expands the legs to securely lock components in place, even under extreme vibration.



Part No.	Nominal Hole (D)	Panel Thickness	Head Style	OD	T	L	P
DR 10	.125	.031 -.140	Round	.187	.047	.190	.075
DR 11	.125	.031 -.140	Round	.218	.060	.225	.075
DR 12	.156	.187 -.250	Binder	.218	.050	.312	.093
DR 18	.156	.218 -.375	Binder	.218	.050	.421	.093
DR 20	.187	.062 -.187	Truss	.437	.075	.281	.125
DR 21	.187	.062 -.125	Binder	.430	.120	.218	.125
DR 28	.187	.031 -.200	Round	.275	.075	.295	.125
DR 30	.187	.156 -.281	Truss	.430	.075	.380	.125
DR 31	.187	.062 -.187	Round	.281	.075	.295	.125
DR 33	.187	.078 -.375	Round	.281	.047	.450	.125
DR 38	.187	.375 -.750	Round	.320	.109	.850	.125
DR 40	.187	.312 -.440	Binder	.281	.075	.535	.125
DR 45	.187	.375 -.500	Binder	.312	.062	.609	.125
DR 46	.187	.078 -.375	Binder	.312	.062	.445	.125
DR 48	.250	.125 -.437	Binder	.468	.080	.585	.150
DR 50	.218	.093 -.350	Round	.370	.080	.450	.120
DR 52	.218	.094 -.312	Binder	.437	.100	.464	.125
DR 55	.218	.031 -.062	Button	.375	.223	.170	.125
DR 60	.218	.187 -.250	Truss	.370	.080	.343	.120
DR 61	.226	.125 -.312	Round	.375	.080	.468	.125
DR 70	.250	.093 -.312	Truss	.468	.080	.500	.150
DR 73	.250	.093 -.312	Binder	.625	.109	.500	.150
DR 79	.250	.062 -.125	Round	.370	.080	.218	.125
DR 80	.250	.350 -.500	Binder	.468	.080	.620	.150
DR 81	.250	.281 -.500	Binder	.625	.109	.620	.150
DR 82	.250	.156 -.330	Binder	.468	.080	.375	.150
DR 90	.275	.093 -.350	Binder	.620	.109	.480	.150
DR 93	.275	.062 -.600	Round	.370	.080	.640	.150

Minimum order 1000.



Plasti-Rivets®

STANDARD

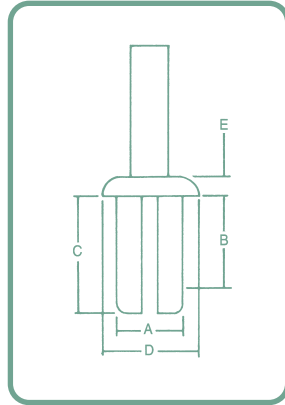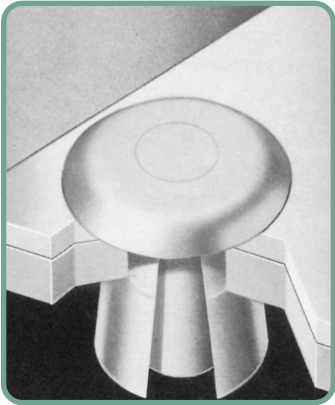

Standard, straight-side, binder head blind fasteners. Standard part economy and availability. Fasten a wide variety of materials, from paperboard to plastics to metal. Easy, one-sided installation. Different lengths accommodate many material thicknesses. Straight-sided rivets are easily inserted in prepared hole. Drive pins are pre-started for easier installation. Moulded from non-conductive thermoplastic that can be colour-coordinated to match product.

Installation: Straight sided rivet is inserted in hole. Rivet legs are tapered on the inside and expand as drive pin is advanced, assuring positive lock.




Rivet installation tools are available.

Part No.	A Nominal Hole Diameter	B Panel Thickness Range	C Prong Length	D Head Diameter	E Head Height
231-080551-05	.125	.031 -.140	.210 -.240	.218	.060
231-090741-00	.136	.040 -.218	.266 -.296	.220	.050
231-121041-02	.188	.040 -.375	.391 -.421	.281	.062
231-161341-03	.250	.040 -.462	.485 -.515	.437	.080
201-161751-00	.250	.281 -.500	.610 -.640	.375	.100
231-250603-00	.250	.120 -.200	.560	.700	.100


Colours: Add suffix 0101 for natural nylon 6 or suffix 0075 for black.

Plasti-Rivets® CONTINUED

SPECIAL

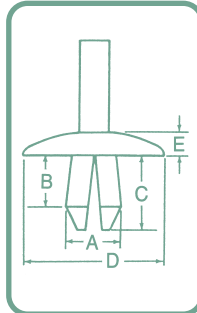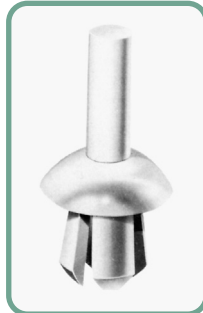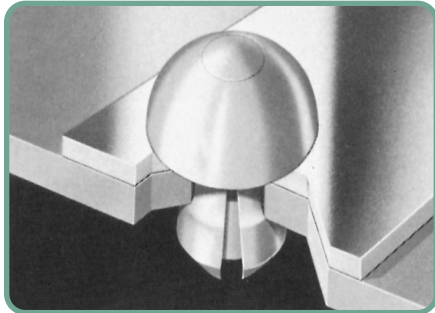

Wide variety of styles and sizes to accommodate different materials and panel thicknesses. Functional head styles provide panel spacing, load distribution, flush mounting, or appearance requirements. Tapered prongs snap positively into fastening hole and expand to hold securely as pin is driven.

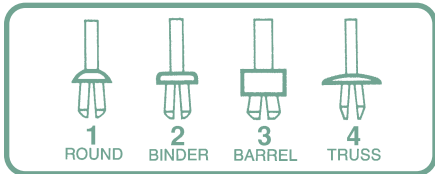

Part No.	A Nominal Hole Dia.	B Panel Thickness Range	C Prong Length	Head Style	D Head Diameter	E Head Height
201-100841-00	.156	.187 -.250	.293 -.323	2	.218	.050
201-101041-00	.156	.218 -.312	.355 -.385	2	.218	.050
201-120541-00	.187	.062 -.156	.198 -.228	3	.375	.125
201-120741-00	.187	.062 -.187	.280 -.310	2	.437	.075
201-120741-01	.187	.062 -.187	.280 -.310	4	.320	.075
201-120751-00	.187	.062 -.187	.280 -.310	1	.281	.075
201-121041-00	.187	.156 -.281	.376 -.406	2	.437	.075
201-121541-00	.190	.312 -.440	.519 -.549	2	.281	.078
201-121741-00	.190	.375 -.500	.593 -.623	2	.437	.075
201-161241-00	.250	.060 -.250	.351 -.381	2	.437	.187
201-161751-00	.250	.281 -.500	.610 -.640	1	.375	.110
201-180401-00	.272	.031 -.109	.175 -.205	3	.375	.312
201-181141-00	.281	.134 -.320	.453 -.483	2	.625	.109

Colours: Add suffix 0101 for natural nylon 6 or suffix 0075 for black.