




Shorty Bushings

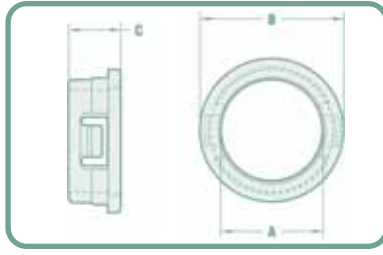

All the same features as the standard snap bushings but can accommodate a smaller chassis thickness.

Locking fingers securely snap into holes with fingertip pressure.

Ask about our Labkit 2 containing an assortment of shorty and snap bushings for R & D purposes.

Part No.	Mounting Hole Diameter	A Inside Diameter	B Head Diameter	C Overall Height	Max. Chassis Thickness	Minimum Order Quantity
B187-125	.187	.125	.250	.234	.062	1,000
B218-125	.218	.125	.281	.234	.062	1,000
B281-218	.281	.218	.343	.234	.062	1,000
B312-250	.312	.250	.375	.234	.062	1,000
B343-218	.343	.218	.406	.250	.062	1,000
B375-250	.375	.250	.437	.250	.062	1,000
B406-281	.406	.281	.468	.250	.062	1,000
B437-312	.437	.312	.500	.250	.062	1,000
B468-343	.468	.343	.530	.250	.062	1,000
B500-375	.500	.375	.562	.250	.062	1,000
B531-406	.531	.406	.593	.250	.062	1,000
B593-468	.593	.468	.656	.250	.062	1,000
B625-500	.625	.500	.703	.250	.062	1,000
B750-625	.750	.625	.828	.250	.062	1,000
B781-625	.781	.625	.859	.250	.062	1,000
B875-750	.875	.750	.937	.250	.062	1,000
B1000-875*	1.000 +.010 -.000	.879	1.060	.250	.062	1,000

Standard colour: **Black.**

White and other colours available at premium charge if quantities are sufficient.

*UL and CSA approval pending.