


Nylon Cable Ties CONTINUED

VALUE-LINE – SCREW MOUNTABLE

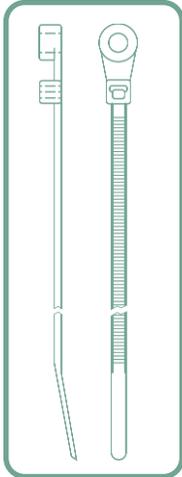

Part No.	Approximate Length	Maximum Bundle Dia.	Minimum Tensile Strength	Suggested Mounting Screw Size	Minimum Order Qty.
Standard Duty					
VMNT5-30	6	1-1/4	30	8	1000
VMNT7-50	7-1/2	1-3/4	50	10	1000
VMNT11-50	11	3	50	10	1000
VMNT14-50	14-1/2	4	50	10	500
Heavy Duty					
VMNT14-120	14-1/2	4	120	1/4	100

UV Black available at an additional charge.

Care and Feeding of Nylon Cable Ties (and other nylon parts)

Here are the two most common problems that come up for customers using nylon cable ties. You will be pleased to know that these two problems can almost always be corrected without having to return the ties.

Brittle ties: When bags of cable ties are sealed at the factory, a few drops of water are added to keep the ties from drying out. Due to the nature of nylon, it is recommended that you not open sealed bags until you need to use the ties and that you re-seal them when


not in use. When storing bags of cable ties, keep them in an area where they won't be affected by heat and dry atmospheres. These suggestions hold true for most nylon parts.

If you find you have a bunch of ties that have become brittle, put them in a plastic bag with 1/4 teaspoon of water and seal the bag. (If you put in more water than that, the ties will get rubbery and you'll have to let them dry out again!) Leave them overnight. Chances are the next day the ties will be fine again. If, however, you still find the ties are brittle, please call us.

Locking mechanism "breaking out":


There are usually two reasons for this. The first is that the tension setting on the tightening tool/tie gun being used may be set too high and needs to be adjusted. The other reason is that the ties are being incorrectly tightened by hand. When inserting the tail into the locking mechanism, it should be pulled through in a straight line. It should not be pulled and bent back in the same manner one inserts a belt into a buckle.

E-Z OFF™

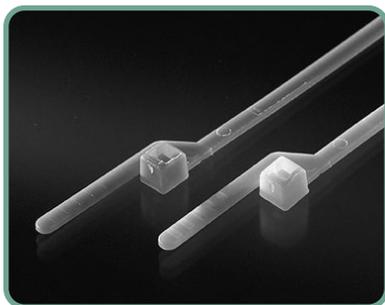

Our E-Z Off™ cable ties are the first permanent cable tie designed specifically to be quickly and safely removed by hand. They provide ease of application, a strong, secure locking device and easy removal without the need of a cutting device.

Simply pull down the tear-off arm located on the right side of the head of the tie.

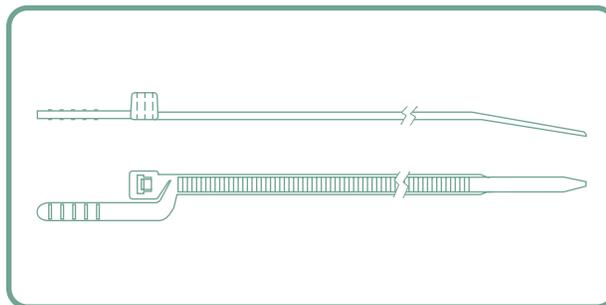

Manufactured in either nylon or polypropylene, they are available in natural as well as red, blue, green, orange, yellow and black as standard colours. Special colours are also available.

They are perfect for securing shipping containers, attaching sports netting, tag attaching, tenting, temporary job-site cabling, agricultural uses, Tier 1 and 2 automotive suppliers or anywhere a tie is

used as a temporary securing device.

They are 5.5" and 8" in length and have a tensile strength of 50 lb. (nylon ties) or 40 lb. (polypropylene). Standard packaging is 1000 ties per bag.

Custom printing is also available. Please call for a quotation.