




# Grommets


## ENCLOZ® SCREW

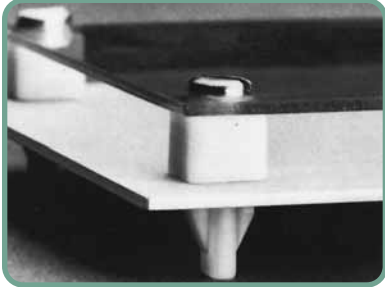

Front mounted grommets provide added thread engagement and increased bearing area. Non-conductive parts fully encapsulate metal screws, providing electrical insulation and protecting against temperature/moisture transfer and exposed screw points.

Accommodates variations in hole size and panel thicknesses. Panel thickness ranges from .020 to .140 and accepts a #8 or #10 screw.


## ENCLOZ® REVERSE

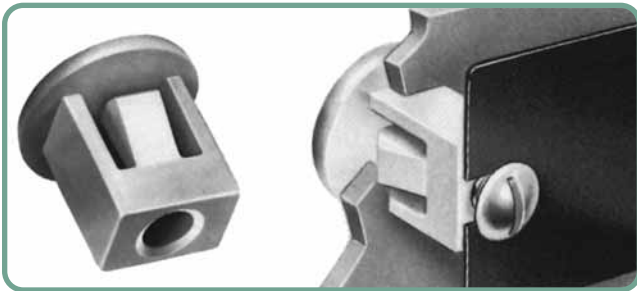

Ideal when components are fastened from the opposite side of the panel. Snap-in grommet covers the screw point with an attractive, decorative head.

Accepts a #8 screw.

## PLASTI-GROMMETS™



One-piece, non-corrosive nylon, self-retaining blind screw receptacle spreads load over wide area for strength and high load bearing capacity. Front snap-in. Insulate at fastening points, protect against electrolytic action, eliminate cross threading.

Choose from different panel hole sizes, panel thickness ranges, screw sizes, head sizes or prong lengths.