




Miniature Nylon Tube Fittings

BARBED ADAPTERS—STRAIGHT



The sharp barb makes a leak-proof seal. Just push on polyurethane, PE, PVC or other soft tubing with end cut straight. (Withstands 75-125 psi depending on tubing.)

Clamp may not be required for low pressure applications.

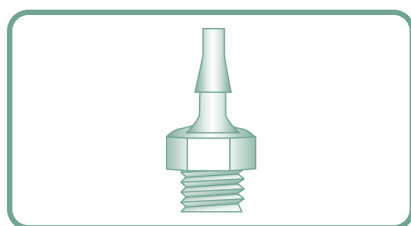

NOTES:

MPT – Male taper pipe thread
FPT – Female taper pipe thread


Temperature Ratings

Nylon: -40° to +100°C
Polypropylene: -20° to +100°C

Part No.		Tube ID	Thread
Nylon	Polypropylene		
MIF 01	MIF 01 PP	1/16	10/32 UNF
MIF 11	MIF 11 PP	3/32	
MIF 21	MIF 21 PP	1/8	
MIF 225	MIF 225 PP	1/8	1/4-28 UNF
MIF 425	MIF 425 PP	1/4	
MIF 02	MIF 02 PP	1/16	1/8 MPT
MIF 12	MIF 12 PP	3/32	
MIF 22	MIF 22 PP	1/8	
MIF 532	MIF 532 PP	5/32	
MIF 32	MIF 32 PP	3/16	
MIF 42	MIF 42 PP	1/4	
MIF 62	MIF 62 PP	3/8	
MIF 62	MIF 62 PP	3/8	
MFF 22	MFF 22 PP	1/8	1/8 FPT
MFF 24	MFF 24 PP		1/4 FPT
MIF 04	MIF 04 PP	1/16	1/4 MPT
MIF 24	MIF 24 PP	1/8	
MIF 34	MIF 34 PP	3/16	
MIF 44	MIF 44 PP	1/4	
MIF 68	MIF 68 PP	3/8	1/2
MIF 88	MIF 88 PP	1/2	

Minimum order 50.

BARBED ADAPTERS—ELBOW

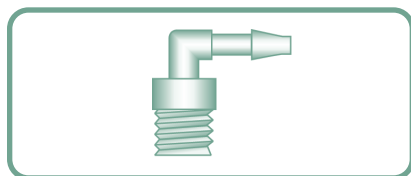

Part No.		Tube ID	Thread
Nylon	Polypropylene		
MIE 01	MIE 01 PP	1/16	10/32 UNF
MIE 21	MIE 21 PP	1/8	
MIE 22	MIE 22 PP	1/8	1/8 MPT
MIE 32	MIE 32 PP	3/16	
MIE 42	MIE 42 PP	1/4	
MEF 32	MEF 32 PP	3/16	1/8 FPT
MEF 42	MEF 42 PP	1/4	

Minimum order 50.