




Shorty Plugs

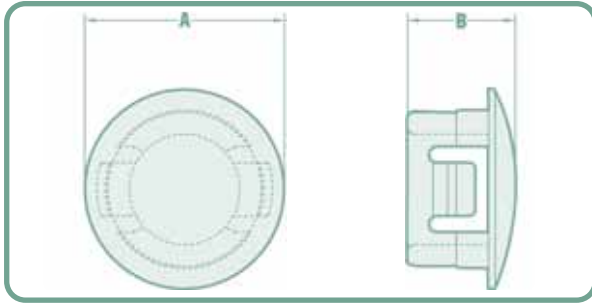

Use when space inside the panel is a problem. Shorty plugs have a limited (1/8") protrusion inside the panel. They have a matte finish head tapering to a thin edge for a smooth finished look. Quickly and easily installed.

Part No.	Mounting Hole Diameter	Head Thickness	A Head Diameter	B Overall Height	Maximum Chassis Thickness
SP218	.218	1/16	9/32	1/4	.062
SP281	.281	1/16	11/32	1/4	.062
SP312	.312	1/16	3/8	1/4	.062
SP343	.343	1/16	13/32	1/4	.062
SP375	.375	1/16	15/32	1/4	.062
SP406	.406	1/16	15/32	1/4	.062
SP437	.437	1/16	17/32	1/4	.062
SP468	.468	1/16	17/32	1/4	.062
SP500	.500	1/16	37/64	1/4	.062
SP531	.531	1/16	19/32	1/4	.062
SP593	.593	1/16	11/16	1/4	.062
SP625	.625	1/16	23/32	1/4	.062
SP750	.750	1/16	27/32	1/4	.062
SP781	.781	1/16	57/64	1/4	.062
SP875	.875	1/16	31/32	1/4	.062
SP1000*	1.000 ^{+010/-000}	1/16	1-13/64	1/4	.062

Minimum order 1000.

Standard colour: Black. Other colours available at premium charge if quantities are sufficient.

*UL and CSA approvals pending.

ALSO AVAILABLE:



PRY OUT PLUGS



INSULATION PLUGS