




# Dome Plugs

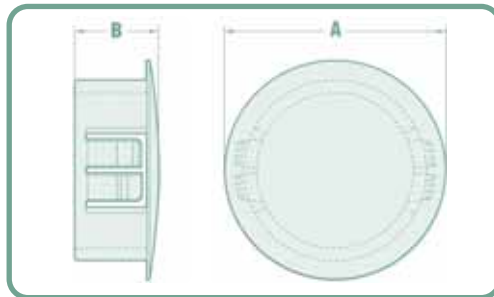

Close unneeded chassis holes. Moulded of black nylon, these feature a convex, matte finish head that tapers to a thin edge. Gives your product an uninterrupted, completed surface you can even paint over. No tools required. Just a quick push locks these firmly into chassis up to 1/4" thick.

Part No.	Mounting Hole Diameter	Head Thickness	A Head Diameter	B Overall Height	Maximum Chassis Thickness	Minimum Order Qty.
DP187	.187	1/16	1/4	15/64	.062	1,000
DP250	.250	1/16	5/16	5/16	.062	1,000
DP312	.312	1/16	3/8	5/16	.062	1,000
DP375	.375	1/16	15/32	13/32	.125	1,000
DP437	.437	1/16	17/32	13/32	.125	1,000
DP500	.500	1/16	37/64	13/32	.125	1,000
DP562	.562	1/16	21/32	13/32	.125	1,000
DP625	.625	1/16	23/32	13/32	.125	1,000
DP687	.687	1/16	25/32	13/32	.125	1,000
DP750	.750	1/16	59/64	13/32	.125	1,000
DP812	.812	1/16	57/64	13/32	.125	1,000
DP875	.875	1/16	1-1/64	29/64	.125	1,000
DP1000	1.000	1/16	1-13/64	29/64	.125	500
DP1093	1.093*	1/16	1-7/32	29/64	.125	500
DP1187	1.187	1/16	1-5/16	29/64	.125	500
DP1250	1.250	1/16	1-3/8	29/64	.125	500
DP1375	1.375	1/16	1-1/2	29/64	.125	500
DP1500	1.500	1/16	1-43/64	29/64	.125	500
DP1750	1.750	1/16	1-29/32	29/64	.125	300
DP2000	2.000	5/64	2-9/64	15/32	.125	300
DP2.093	2.093**	7/64	2-1/4	3/4	.250	200
DP2.25	2.250	7/64	2-27/64	3/4	.250	200
DP2.5	2.500	7/64	2-23/32	3/4	.250	100
DP3.0	3.000	7/64	3-11/64	3/4	.250	100
DP3.375	3.375	7/64	3-21/32	3/4	.250	100
DP3.5	3.500	7/64	3-21/32	3/4	.250	100
DP4.0	4.000	7/64	4-5/32	3/4	.250	50
DP5.0	5.000	7/64	5-7/32	25/32	.250	150
DP6.0	6.000	7/64	6-7/32	25/32	.250	130

**Standard colour: Black. Other colours available at premium charge if quantities are sufficient.**


\* can be used up to 1.125 diameter.

\*\* can be used up to 2.125 diameter.



# Dome Plugs CONTINUED

## DOUBLE "D"

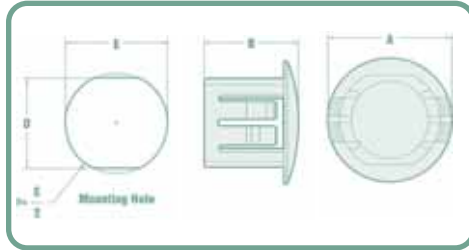


Got a strain relief hole where it shouldn't be? Don't start again; just fill it with a double "D" plug. These work for other chorded or "DD" holes as well (holes punched or moulded with two opposing flats). The convex, matte finish head tapers to a thin edge, giving your chassis a completed look. All sizes have a head thickness of 1/16", and fit a maximum chassis thickness of .125".

Part No.	Mounting Hole Diameter	D To Prevent Rotation	A Head Diameter	B Overall Height
DD437-390	.437	.390	17/32	13/32
DD500-445	.500	.445	37/64	13/32
DD562-530	.562	.530	21/32	13/32
DD625-550	.625	.550	23/32	13/32
DD750-625	.750	.625	59/64	13/32
DD875-770	.875	.770	1-1/64	29/64

Minimum order 1000.

## THICKER PANEL DOME

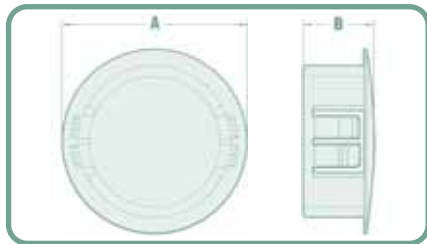

Closes unneeded panel holes and electrical knock-outs. All-nylon construction. Convex matte finish head tapers to a thin edge. (Approximate head thickness .063".)

Locking fingers 'snap' into holes with fingertip pressure for quick and easy installation.

Withstands a push-back force of 35 pounds.

Part No.	Mounting Hole Diameter	A Head Diameter	B Overall Height	Maximum Chassis Thickness
DPT500	.500	.578	.562	.250
DPT625	.625	.718	.562	.250
DPT750	.750	.921	.562	.250
DPT875	.875	1.015	.562	.250
DPT1000	1.000	1.203	.562	.250
DPT1093	1.093 -1.125	1.218	.562	.250
DPT1187	1.187	1.312	.562	.250
DPT1250	1.250	1.375	.562	.250
DPT1375	1.375	1.500	.562	.250
DPT1500	1.500	1.671	.562	.250
DPT1750	1.750	1.906	.562	.250
DPT2000	2.000	2.170	.580	.250

Standard Colour: Black or White.