



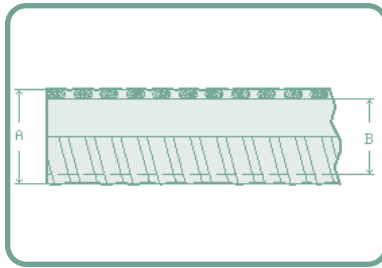

Liquid Tight Conduit

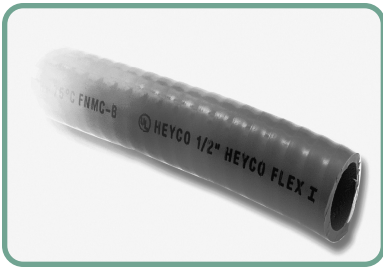

This UL Type B flexible, non-metallic tubing resists corrosion, abrasion, oil, water, acid, metal shavings and rough environments. It is for use with nylon straight, snap-in or sweep connectors as well as steel and die cast connectors. Mounting brackets are also available. Resists abuse, pull and crushing.


Smooth inside for easier wire pulling; will not harm conductors. No hazardous sharp edges or burrs. Quick installation. Suitable for indoor/outdoor use. Manufactured of flexible PVC.

Part No.	Trade Size	A Outside Diameter	B Inside Diameter
HF1-3/8	3/8	.700	.494
HF1-1/2	1/2	.830	.632
HF1-3/4	3/4	1.040	.830
HF1-1	1	1.303	1.054
HF1-1 1/4	1-1/4	1.645	1.395
HF1-1 1/2	1-1/2	1.883	1.588
HF1-2	2	2.358	2.033

Standard colour: Gray.



Liquid Tight Tubing

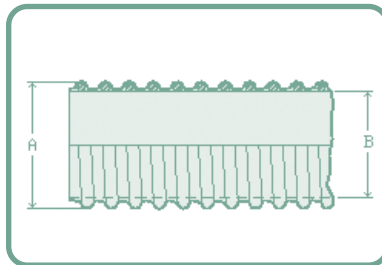

Same advantages as the liquid tight conduit but has more flexibility and can be used in extremely tight quarters. Manufactured of flexible PVC, it is ideal for fibre optic cable protection and is also suitable for use in high vibration or flexing applications.

Part No.	Trade Size	A Outside Diameter	B Inside Diameter
HF2-1/4	1/4	.568	.395
HF2-3/8	3/8	.700	.494
HF2-1/2	1/2	.830	.632
HF2-3/4	3/4	1.040	.830
HF2-1	1	1.303	1.054
HF2-1 1/4	1-1/4	1.645	1.395
HF2-1 1/2	1-1/2	1.883	1.588
HF2-2	2	2.358	2.033

Standard colour: Black.