




Slit Tubing

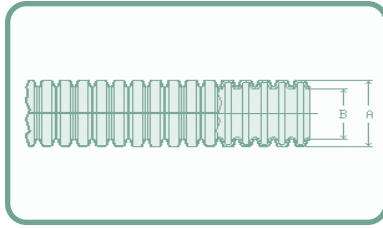

Slit design allows side entry and encirclement of pre-assembled harnesses and capillary tubes. Unique design allows for wire breakouts.

All nylon construction resists salt water, gasoline, oil, weak acids, alcohol, grease and common solvents.

Lightweight and flexible yet highly durable. Quick installation, cuts with utility knife, PVC cutter or Heyco cutting tool VF28. Mounting brackets also available.

Part No.	Nominal Diameter	A Outside Diameter	B Inside Diameter	Wall Thickness Range
HF5-1/8	1/8	.270	.174	.012 -.017
HF5-1/4	1/4	.387	.278	.013 -.018
HF5-5/16	5/16	.496	.357	.015 -.025
HF5-3/8	3/8	.540	.420	.015 -.025
HF5-7/16	7/16	.609	.447	.015 -.025
HF5-1/2	1/2	.675	.505	.015 -.025
HF5-5/8	5/8	.816	.650	.015 -.025
HF5-3/4	3/4	.932	.772	.015 -.025
HF5-1	1	1.106	.917	.015 -.025
HF5-1 1/16	1-1/16	1.335	1.065	.017 -.030
HF5-1 1/4	1-1/4	1.460	1.281	.017 -.030
HF5-1 3/8	1-3/8	1.610	1.383	.017 -.030
HF5-1 1/2	1-1/2	1.851	1.531	.017 -.030

Standard colour: **Black.**