




# Snap Bushings



These nylon bushings convert raw-edged holes to smooth, neat, insulated ones. Special locking “fingers” allow the bushings to snap into holes with fingertip pressure. Mechanically protect, insulate, and isolate telecommunications and electrical cables, tubing, hose, rope and utility lines.

SB312-3, SB375-4 and SB437-4 are also available as brass-coloured parts for lamp and lighting applications.



Part No.	Mounting Hole Diameter	A Inside Diameter	B Head Diameter	C Overall Height	Max. Chassis Thickness	Minimum Order Quantity
SB250-040*	.250	.125	.312	.312	.040	1,000
SB250-2*	.250	.125	.312	.312	.062	1,000
SB312-3*	.312	.187	.375	.312	.062	1,000
SB375-3	.375	.187	.468	.406	.125	1,000
SB375-4	.375	.250	.468	.406	.125	1,000
SB375-281*	.375	.281	.468	.406	.172	1,000
SB437-4	.437	.270	.531	.406	.125	1,000
SB437-5	.437	.312	.531	.406	.125	1,000
SB437-243	.437	.243 <sup>+0.015,-0.000</sup>	.531	.406	.125	1,000
SB500-4	.500	.250	.578	.406	.125	1,000
SB500-5	.500	.312	.578	.406	.125	1,000
SB500-6	.500	.391	.578	.406	.125	1,000
SB562-5	.562	.312	.656	.406	.125	1,000
SB562-6	.562	.391	.656	.406	.125	1,000
SB562-7	.562	.437	.656	.406	.125	1,000
SB625-4	.625	.250	.718	.406	.125	1,000
SB625-7	.625	.437	.718	.406	.125	1,000
SB625-8	.625	.500	.718	.406	.125	1,000
SB625-500*	.625	.500 <sup>+0.015,-0.000</sup>	.703	.531	.280	1,000
SB687-8	.687	.500	.781	.406	.125	1,000
SB687-9	.687	.562	.781	.406	.125	1,000
SB750-6	.750	.391	.843	.406	.125	1,000
SB750-8	.750	.500	.843	.406	.125	1,000
SB750-9	.750	.562	.843	.406	.125	1,000
SB750-10	.750	.609	.843	.406	.125	1,000

Standard colour: Black. White and other colours available at premium charge if quantities are sufficient.

Continued

\*Depicts single chassis design.



# Snap Bushings CONTINUED


Part No.	Mounting Hole Diameter	A Inside Diameter	B Head Diameter	C Overall Height	Max. Chassis Thickness	Minimum Order Quantity
<b>SB750-625*</b>	.750	.625 <sup>+.015</sup> <sub>-.000</sub>	.828	.531	.250	1,000
<b>SB812-9</b>	.812	.562	.890	.406	.125	1,000
<b>SB812-10</b>	.812	.625	.890	.406	.125	1,000
<b>SB875-6</b>	.875	.375	.953	.453	.125	1,000
<b>SB875-7</b>	.875	.437	.953	.453	.125	1,000
<b>SB875-8</b>	.875	.500	.953	.453	.125	1,000
<b>SB875-9</b>	.875	.562	.953	.453	.125	1,000
<b>SB875-10</b>	.875	.625	.953	.453	.125	1,000
<b>SB875-11</b>	.875	.687	.953	.453	.125	1,000
<b>SB1000-12</b>	1.000	.766	1.125	.453	.125	500
<b>SB1093-13</b>	1.093-1.125	.812	1.218	.453	.125	500
<b>SB1093-14</b>	1.093-1.125	.875	1.218	.453	.125	500
<b>SB1093-15</b>	1.093-1.125	.937	1.218	.453	.125	500
<b>SB1187-15</b>	1.187	.937	1.312	.453	.125	500
<b>SB1250-15</b>	1.250	.937	1.359	.453	.125	500
<b>SB1250-16</b>	1.250	1.000	1.310	.453	.125	500
<b>SB1375-14</b>	1.375	.875	1.468	.453	.125	500
<b>SB1375-16</b>	1.375	1.000	1.468	.453	.125	500
<b>SB1500-17</b>	1.500	1.062	1.609	.453	.125	500
<b>SB1500-18</b>	1.500	1.125	1.609	.453	.125	500
<b>SB1500-21</b>	1.500	1.312	1.609	.453	.125	500
<b>SB1750-22</b>	1.750	1.375	1.875	.453	.125	300
<b>SB2000-26</b>	2.000	1.640	2.125	.453	.125	300
<b>SB2000-28</b>	2.000	1.750	2.125	.453	.125	300
<b>SB2093-29</b>	2.093	1.813	2.350	.720	.250	300
<b>SB2.25-29</b>	2.250	1.860	2.480	.720	.250	100
<b>SB2.5-31</b>	2.500	1.970	2.660	.720	.250	100
<b>SB3.0-39</b>	3.000	2.470	3.160	.720	.250	100
<b>SB3375-45</b>	3.375	2.812	3.660	.720	.250	100
<b>SB3.5-47</b>	3.500	2.940	3.660	.720	.250	100
<b>SB4.0-55</b>	4.000	3.480	4.170	.720	.250	100
<b>SB5.0-75</b>	5.000	4.375	5.219	.740	.250	150
<b>SB6.0-86</b>	6.000	5.375	6.219	.740	.250	130

**Standard colour: Black. White and other colours available at premium charge if quantities are sufficient.**

\*Depicts single chassis design.



## Snap Bushings for Thicker Panels

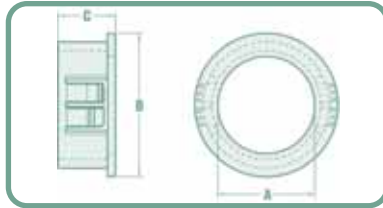

Has the same application as the snap bushings but can accommodate a thicker panel.

Locking fingers snap into holes with fingertip pressure. Withstands a push-back force of 35 pounds.

Part No.	Mounting Hole Diameter	A Inside Diameter	B Head Diameter	C Overall Height	Max. Chassis Thickness	Minimum Order Quantity
SBT500-6	.500	.391	.578	.562	.250	1,000
SBT875-11	.875	.687	.953	.562	.250	1,000
SBT1000-12	1.000	.766	1.125	.562	.250	1,000
SBT1093-15	1.093 -1.125	.937	1.218	.562	.250	1,000
SBT1187-15	1.187	.937	1.312	.562	.250	1,000
SBT1250-16	1.250	1.000	1.310	.562	.250	500
SBT1375-16	1.375	1.000	1.500	.562	.250	500
SBT1500-21	1.500	1.312	1.620	.562	.250	500
SBT1750-22	1.750	1.375	1.875	.562	.250	500
SBT2000-26	2.000	1.625	2.125	.562	.250	500

Standard colour: **Black**. White and other colours available at premium charge if quantities are sufficient.